




## Technical data

### HDE-S | 500 STROKE OSCILLATING FRAME SASH GANG

TECHNICAL DATA		HDE-S	HDE-S/SV	HDE 56
Sash width	mm	700	700	560
Sash clearance	mm	670	670	550
Stroke	mm	500	500	500
Revolutions max.	1/min.	310	300	340
Feed speed	m/min.	0-13	0-12	0-16
Feed power	kW	7	6,5	7
Drive pulley ø	mm	1000	1000	900
Main drive motor	kW	75	75	75
Machine weight	t	8,6	9	8,7

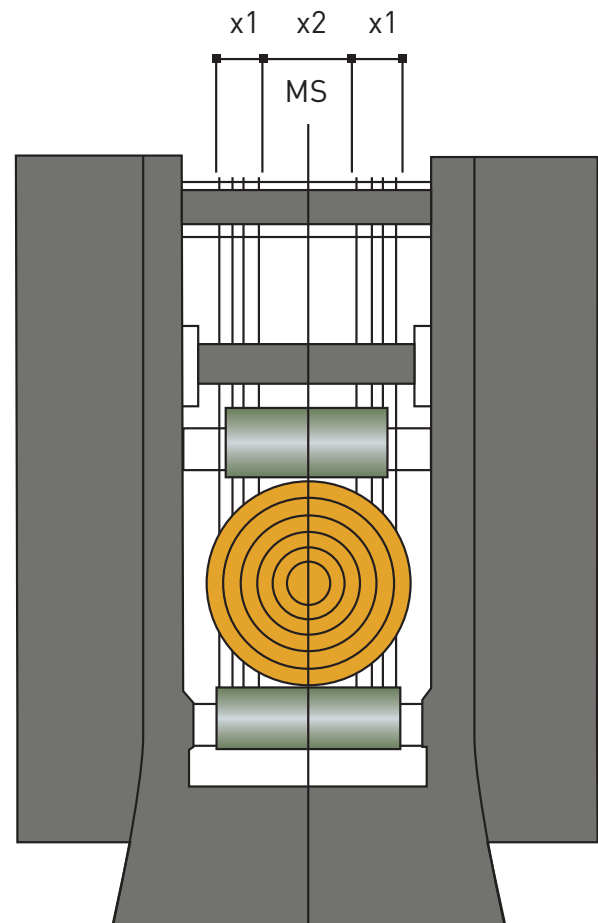

#### ADJUSTMENT RANGE WIDTH ADJUSTMENT

x1 : max.	mm	140	
x2 : min.	mm	40	without MS center split saw
x2 : min.	mm	65	with MS center split saw
x2 : max.	mm	340	

Due to constant product improvements or developments the illustrations and specifications contained in this brochure are subject to change without notice.